



Range Overview

Softmounted washer-extractors



Tumble Dryers



Drying cabinets



SHP250

SPEED QUEEN SOFTWASH

SoftWash® Technologie

SoftWash®, an innovative wet system based on hydraulic action. A recirculation pump called Shower-Jet™ extracts the water from the bottom of the drum and makes it recirculates by pumping it upward. Instead of spinning the drum, the system moves the water around the garments. This increases the load factor of the washer-extractors substantially.




The innovative and high-performance Shower-Jet™ technology gives you plenty of advantages:

- Better cleaning quality
- Easy to use
- Lower running cost
- Increased loading factor (up to 2/3 for wool)
- Possibility to clean more delicate fibers
- Better protection of the garments
- Very little additional finishing time
- Only available on models SY-105 - SY135 - SY180 - SY240 & SY280

Shower-Jet

Washers control

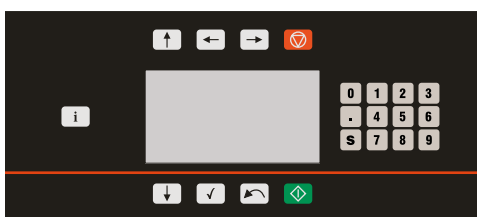

QED SELECT

- 60 cycles
- Fully programmable
- Graphic display
- Multilingual (21 languages)
- USB port

SPEED QUEEN SOFTWASH

Softmounted washer extractor

SY105, SY135, SY180, SY240, SY280

Features

- Cascade Drum
- Freestanding, high spin
- Stainless steel top front panel, side panels
- Stainless steel drum and tub
- Prep for boiler fed as a standard
- Electric heating as an option
- QED Select – fully programmable Heavy-duty bearings and seals
- Patented soap hopper
- Easy access to all vital parts from the front
- Large door opening for easy loading and unloading
- Perforated lifting ribs: more mechanical action and lower water consumption



SY105

SY135

SY180

SY240

SY280

SPEED QUEEN SOFTWASH

SOFTMOUNTED WASHER-EXTRACTOR

Effective as from :		January 1st, 2019			INTERNATIONAL SALES	
List price in :		USD				
Prices reflect FCA :						
COMMERCIAL SOFTMOUNT WASHERS - SOFTWASH						
Commercial Model Name		SY105	SY135	SY180	SY240	SY280
Drum Volume (liter)		105	135	180	240	280
Dry Weight Capacity kg/lb 10:1		11/25	14/30	18/40	24/55	28/65
Extract G-Force		400	400	400	400	350
Standard electric Power rate (kW)		9	12	12	18	21,9
CONTROL	Softwash	10.519	12.266	15.083	20.717	23.790
HEATING OPTIONS	Boiler Fed	Standard	Standard	Standard	Standard	Standard
	Electric heating and Prep for Steam Heating	405	728	728	728	728
VOLTAGE OPTIONS	200-240/50/60/1 (only with Boiler Fed and Steam)	OPT-NC	OPT-NC	OPT-NC	OPT-NC	OPT-NC
	200-240/50/60/3	OPT-NC	OPT-NC	OPT-NC	OPT-NC	OPT-NC
	380-415/50/60/3+N	Standard	Standard	Standard	Standard	Standard
OPTIONS	3rd water inlet	Standard	Standard	Standard	Standard	Standard
	Stainless steel front panel	Standard	Standard	Standard	Standard	Standard
	Extra USB & Networkcable at rear side of the machine	Standard	Standard	Standard	Standard	Standard
	Liquid Soap print (8 x 24VAC Signals)	Standard	Standard	Standard	Standard	Standard
ACCESSORIES	Liquid soap pumps, water softener, water heater and base frames are available through "ALS Genuine Parts"					
PACKING INFO	Film packing	Standard	Standard	Standard	Standard	Standard
	Wooden case packing	576	863	894	1.019	1.124
Please specify when ordering: Type, Control, Heating Option, Voltage Option & Additional Options if any.						
Prices & specifications subject for modification without prior notice.						

Legend:

Standard: execution with no added price, N/A: not available option, OPT-NC: option at no cost

CONFIDENTIAL - DO NOT DISTRIBUTE

SPEED QUEEN SOFTWASH

Heat Pump Industrial Tumble Dryers

SHP250, SHP285, SHP345

Features

- Heat pump
- Standard stainless steel drum with large diameter
- Standard Full control microprocessor
- Combination of Radial and Axial airflow
 - Maximal heat transfer
 - Low energy consumption
 - Short drying time
- Large door opening for easy loading and unloading
- Self cleaning lint screen
- Standard reversing drum
- Standard humidity control
- Standard automatic condense filter rinsing system




DRYERS CONTROL



FULL CONTROL

- Up to 20 cycles, 9 preprogrammed
- 5 special wetcleaning cycles
- Temperature freely programmable
- Drying time freely programmable
- Cool down time freely programmable

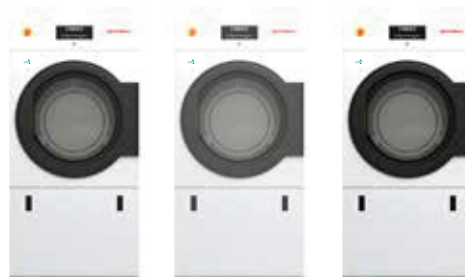

SHP250

SHP285

SHP345

Effective as from :		January 1st, 2019		INTERNATIONAL SALES	
List price in :		USD			
Prices reflect FCA :					
COMMERCIAL HEATPUMP TUMBLERS					
Commercial Model Name		SHP250	SHP285	SHP345	
Drum Volume (liter)		250	285	345	
Capacity kg (20:1)		13	14	17	
Capacity kg (25:1)		10	11	14	
Stainless steel drum		Standard	Standard	Standard	
CONTROL	Flex Control	14.967	15.591	15.759	
VOLTAGE OPTIONS	208-240/50/1	1.475	1.475	1.475	
	208-240/50/3	118	118	118	
	380-415/50/3 +N	Standard	Standard	Standard	
OPTIONS	Reversing drum	Standard	Standard	Standard	
	Stainless steel front panel	477	477	477	
	Humidity control	Standard	Standard	Standard	
	Automatic condenser filter rinsing system	Standard	Standard	Standard	
ACCESSORIES	Sliding base frames for easy Heat Pump maintenance are available through "ALS Genuine Parts"				
PACKING INFO	Film packing	Standard	Standard	Standard	
	Wooden case packing	811	811	811	
Please specify when ordering: Type, Control, Heating Option, Voltage Option & Additional Options if any.					
Prices & specifications subject for modification without prior notice.					

Legend:

Standard: execution with no added price, N/A: not available option, OPT-NC: option at no cost

CONFIDENTIAL - DO NOT DISTRIBUTE

SPEED QUEEN SOFTWASH

Industrial Tumble Dryers


SU025, SU030, SU035, SU055, SU050

Features

- Large door opening for easy loading and unloading
- Standard stainless steel drum
- Unique drum supporting system
- Large lint filter
- Axial airflow (SU025, SU030, SU035, SU055)
- Radial airflow (SU050)
- Quantum Gold control
- Standard reversing drum



DRYERS CONTROL

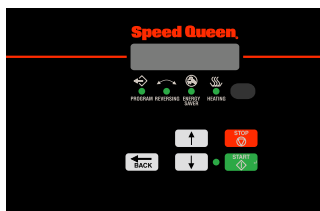

QUANTUM GOLD

- Quantum Gold offers three modes of operation (time, auto and moisture dry) along with the flexibility of 30 programmable cycles and optional moisture sensing technology (OPT) that prevents over drying, saving time and energy



Effective as from :		January 1st, 2019		INTERNATIONAL SALES		
List price in :		USD				
Prices reflect FCA :						
INDUSTRIAL TUMBLE DRYERS SOFTWASH						
Commercial Model Name		ST25	ST30	ST35	ST50	ST55
	Drum Volume (liter)	217	271	347	528	491
	Type of airflow	Axial	Axial	Axial	Radial	Axial
CONTROL	Quantum Gold : OPL microprocessor	5.436	5.937	6.097	7.068	6.800
HEATING OPTIONS	Gas heating (please specify type when ordering)	Standard	Standard	Standard	Standard	Standard
	Steam heating	869	869	869	1.229	N/A
	Electric Heating	366	366	366	407	407
VOLTAGE OPTIONS - GAS/STEAM	100-120V/50-60Hz/1Ph	OPT-NC	OPT-NC	OPT-NC	OPT-NC	OPT-NC
	200-240V/50-60Hz/1-3Ph	Standard	Standard	Standard	Standard	Standard
	440-480V/50-60Hz/3Ph	OPT-NC	OPT-NC	OPT-NC	OPT-NC	OPT-NC
	380-415V/50-60Hz/3Ph	OPT-NC	OPT-NC	OPT-NC	OPT-NC	OPT-NC
	200-240V/50-60Hz/3Ph	N/A	N/A	N/A	N/A	N/A
VOLTAGE OPTIONS - ELECTRIC	200-208V/50-60Hz/1Ph	OPT-NC	OPT-NC	OPT-NC	N/A	OPT-NC
	230-240V/50-60Hz/1PH	OPT-NC	OPT-NC	OPT-NC	OPT-NC	OPT-NC
	200-208V/50-60Hz/3Ph	OPT-NC	OPT-NC	OPT-NC	OPT-NC	OPT-NC
	230-240V/50-60Hz/3Ph	Standard	Standard	Standard	Standard	Standard
	380V/50-60Hz/3Ph	OPT-NC	OPT-NC	OPT-NC	OPT-NC	OPT-NC
	400-415V/50-60Hz/3Ph	OPT-NC	OPT-NC	OPT-NC	OPT-NC	OPT-NC
	440V/50-60-Hz/3PH	OPT-NC	OPT-NC	OPT-NC	OPT-NC	OPT-NC
	460-480V/50-60Hz/3Ph	OPT-NC	OPT-NC	OPT-NC	OPT-NC	OPT-NC
OPTIONS	Reversing Cylinder	Standard	Standard	Standard	Standard	Standard
	Moisture Sensing	Standard	Standard	Standard	Standard	Standard
	Fire Supression System (not in combination with Electric Heat)	522	522	522	522	522
	Stainless Steel Front (All Panels)	245	245	245	424	402
	Stainless Steel Cylinder	Standard	Standard	Standard	Standard	Standard
	ECO-LINE - Specify Natural Gas or Electric, not available with Steam	OPT-NC	OPT-NC	OPT-NC	N/A	OPT-NC
	Rotation Sensor	Standard	Standard	Standard	Standard	Standard
APPROVALS OPTIONS	North America Agency approval	Standard	Standard	Standard	Standard	Standard
	European Union (CE Marked) Approval	236	236	236	420	420
	Australian Gas Approval	236	236	236	420	420
	China Gas Approval	236	236	236	420	420
	Japan Gas Approval	236	236	236	420	420
	Korean Gas Approval (LP and Natural Gas Only)	236	236	236	420	420
	Thailand TISI Approval	236	236	236	420	420
	Saudi Arabia Approval	N/A	N/A	N/A	420	N/A
PACKING INFO	Film packing	Standard	Standard	Standard	Standard	Standard
	Shipping Crate Packing	193	193	193	223	223

Please specify when ordering: Type, Control, Heating Option, Voltage Option & Additional Options if any.
 Prices & specifications subject for modification without prior notice.

Legend:

Standard: execution with no added price, N/A: not available option, OPT-NC: option at no cost

CONFIDENTIAL - DO NOT DISTRIBUTE

Drying Cabinet

DC8

Features

- Very low energy consumption, only 0,5 kWh/kg, very short drying time, 42 minutes.
- Four automatic programs and one program for time dry
- HTS - measures the level of humidity every single second, to determine exactly when the textiles are dry.
- 16m hanging length
- Double overheat-protection for increased security.
- The top is removable for easier handling and installation.
- Test program and error codes make it easier for maintenance
- Double sheet metal in sides and doors minimize loss of energy
- Hanging frame can be rotated 180°
- Two fans create perfect balance between evacuated and re-circulated air
- Service menu with possibilities to adjust the function of the cabinet
- CE approved



Effective as from :		January 1st, 2019	INTERNATIONAL SALES
List price in :		USD	
Prices reflect FCA :			
DRYING CABINETS			
Commercial Model Name			DC 8
Capacity TYPE			8kg Normal
HEATING	Electric heating		4.597
	Heatpump heating		N/A
VOLTAGE OPTIONS	220-240/50/60/3		678
	380-415/50/60 + N		Standard
ACCESSORIES	Hanging rail		Standard
	Single bar clothes hanger		122
PACKING INFO	Film packing		Standard
Please specify when ordering: Type, Control, Heating Option, Voltage Option & Additional Options if any. Prices & specifications subject for modification without prior notice.			

Legend:

Standard: execution with no added price, N/A: not available option, OPT-NC: option at no cost

CONFIDENTIAL - DO NOT DISTRIBUTE

List of Accessories

Dosing Pump Set

- 567105 EvoClean 4 dosing pumps = 795\$
- 567106 EvoClean 6 dosing pumps = 965\$



Water Heaters

- 562736 – 8.8kW, 50/60Hz, 230V = 366\$

If cold water temperature is below 10°C



Water Softeners

- 562737 – 30 liters AMVE305 = 855\$
- 562750 - 50 liters AMVE505 = 1020\$

If cold water hardness is above 10° fH or 100ppm



Accessories are NET prices and have to be ordered through "ALS Genuine parts". The delivery will be machine & accessories together.

<https://my.alliancels.net/en-us/Ordering-Parts-and-Warranty/Parts>

Example of Softwash pack

EXAMPLE OF SOFTWASH PACK					
Package	Washer	Dryer	Dosing system	Option 1 Softener	Option 2 Water heater
Pack SW 5	SY 105	SU 025	EvoClean 4 or 6 Pumps	Softener if the hardness is above 10° fH (french degree) or 100 ppm	Water heater if the cold water temperature is below 15° C or 59° F
Pack SW 8	SY 135	SU 030	EvoClean 4 or 6 Pumps		
Pack SW 11	SY 180	SU 035	EvoClean 4 or 6 Pumps		
Pack SW 12	SY 240	SU 050	EvoClean 4 or 6 Pumps		
Pack SW 18	SY 280	SU 050	EvoClean 4 or 6 Pumps		

HOW TO ORDER SOFTWASH PACK



Don't forget

1. Select the model (capacity) of washer and dryer or stack
2. Select heating option
3. Select voltage option
4. Select additional options on machine if any
5. Select packing of machines
6. Select accessories (they have to be ordered through „ALS Genuine parts“ but will be delivered with the machines)

Dosing pump set is MANDATORY:

- Select water heater only if your input water temperature is below 10°C
- Select water softener only if your water hardness is above 10° fH or 100 ppm

CZECH REPUBLIC

Alliance Laundry CE
Místecká 1116
Příbor, 742 58, Czech Republic
Phone: +420 556 768 800
Fax: +420 556 768 882
alliancelaudry.cz

FRANCE

Alliance Laundry France
3 rue Paul Rieupeyroux
F-69800 Saint Priest, France
Phone: +33 (0)4 78 79 55 75
Fax: +33 (0)4 72 04 62 72
alliancelaudry.fr

ITALY

Alliance Laundry Italy SRL
73, Via Triumplina
25123 Brescia (BS), Italy
Phone: +39 (0)30 2091006
Fax: +39 (0)30 2000239
alliancelaudry.com

SPAIN

Alliance Laundry Systems Spain
C/ Solsones, 2
08820 – El Prat de Llobregat
Barcelona, Spain
Phone: +34 93 479 54 10
Fax: +34 93 379 18 76
alliancelaudry.com/es

COD (Czech Order Desk)

T: +420 556 768 800
salessupport@alliancels.cz

WORLDWIDE HEADQUARTERS

Alliance Laundry Systems
P.O. Box 990 Shepard Street
Ripon, WI 54971, USA
Phone: +1 920 748 3121
Fax: +1 920 748 4564
alliancelaudry.com

BRASIL

Alliance Laundry Systems Brasil
Edifício Office Design Berrini
Avenida Luis Carlos Berrini,
1748 Conjunto 2106
São Paulo- SP, 04571-000, Brasil
Phone: +55 (11) 5505-2917
Phone: +55 (11) 5102-2938
alliancelaudry.com.br

CHINA

Alliance Laundry Machinery
Commercial And Trading
Shanghai Co., Ltd.
Room 101 A, 1st Floor, No.1 Building
NO.888 Lane Tianlin Road
Min Hang District, Shanghai, China
Post code: 200233
Phone: +86 21 33375288
Fax: +86 21 64227933
alliancelaudry.cn

ROD (Ripon Order Desk)

T: +1 9207483687
salessupport@alliancels.com

U.A.E.

Alliance Laundry BVBA
(Dubai Branch)
The Curve Building
Showroom GS-08
P.O. Box 393291
Al Quoz 3
Dubai, U.A.E.
Phone: +971 4 347 4136
Phone: +971 4 347 4137
Fax: +971 4 347 4180
alliancelaudry.com

GERMANY

Alliance Laundry Germany GmbH
Tilsiter Str. 4-6
D – 71065 Sindelfingen
Germany
Phone: +49 7031 777 04 55
Fax: +49 7031 260 16 35
alliancelaudry.com

www.softwash-solution.com

Speed Queen by Alliance Laundry Systems